PAKTEC
PACKAGE WITH CONFIDENCE

AUTO L-SEALER VALUE SERIES

*VSA1721

AUTO L-SEALER
VALUE SERIES

MODELS
VSA1721, VSA2530

BUILT RIGHT...PRICED RIGHT
Proven reliable over and over again, these intermediate level EASTEY Automatic L-Sealers provide you with all the quality features found in much higher priced machines. They are designed and built to give you all the performance features needed for positive sealing a wide variety of films including polyolefin, polyethylene, and PVC.

PROVEN RELIABILITY, EFFICIENT DESIGN
Designed specifically for entry-level or intermediate applications that require simple operation, small footprint, or a limited budget, Eastey's Value-Series Automatic L-Sealers will handle the day to day abuse required for automatic sealing.

STANDARD FEATURES
- Designed to seal most polyolefin, polyethylene, and PVC shrink films
- Normal speed infeed and outfeed conveyors
- High speed with product indexing
- Motorized seal height adjustment for various product sizes
- Seal head equipped with pneumatic air cylinder for automatic sealing

EASTEY
ENGAGE technologies corporation

RELIABLE AUTOMATIC L-SEALING
EASTEY Value Series Automatic L-Sealers offer the durability and functionality needed to handle a variety of applications efficiently.

STANDARD FEATURES (cont.)
- Hot knife seal bar for consistent and clean seal
- Consistent pressure across seal bar
- Closing conveyor bridges the gap for a clean product transfer, then retracts for the seal bar
- Automatic cycle timing with adjustable dwell time
- HMI controller with simple menus for easy operation
- Film tracking wheels keep film in place
- Multiple pin perforator provides precise air evacuation
- Heavy duty casters for transportation within plant
- Leveling legs provide sturdy base once in place
- VSA1721 features a 17"W x 21"L seal area
- VSA2530 features a 25"W x 30"L seal area
- Scrap unwind automatically wraps up the scrap film left from the sealer
- Easy to use design requires minimal training and maintenance
- VSA1721 Packaging Capacity: approx. 20-25/min depending on product size
- VSA2530 Packaging Capacity: approx. 15/min depending on product size
- VSA1721 Package Height: .2" – 4.75"
- VSA2530 Package Height: .4" – 10.25"
- VSA1721 maximum film width up to 22"
- VSA2530 maximum film width up to 32"
- Maximum film roll OD up to 12"
- 80 psi
- Available in 220v

OPTIONAL ACCESSORIES
- Transfer Roller Kit - for short and/or light weight products

**Ask Us About Custom Equipment*

AUTO L-SEALER
VALUE SERIES

*VSA2530



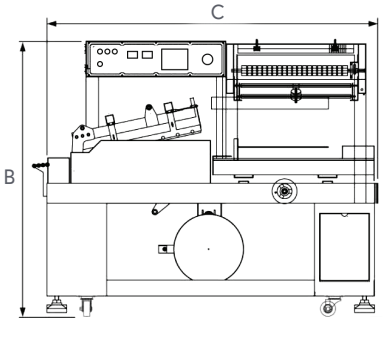

*VSA1721

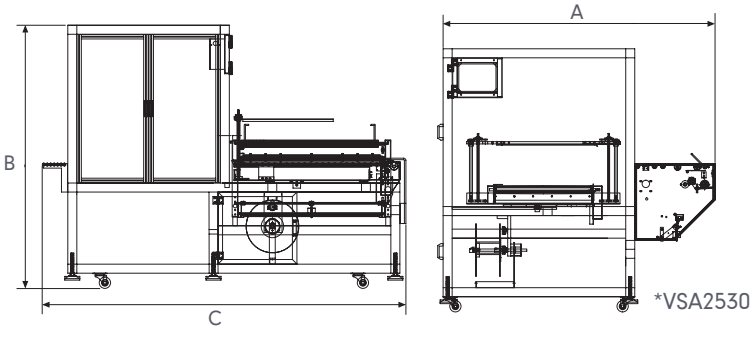

*VSA2530

1. ***VSA1721 HMI***
   User interface features simple menus for easy operation and adjustments required for a variety of applications

2. ***VSA2530 HMI***
   User interface features simple menus for easy operation and adjustments required for a variety of applications

3. ***Pin Perforator***
   Adjustable pin perforator provides air evacuation in the film for clean and tight film shrinkage

4. ***Roller Exit Tabler***
   Provides a smooth transition from the seal area to the shrink tunnel

5. ***Quality Seal***
   Automatic closing conveyor bridges the gap for a clean product transfer, then retracts to make way for the hot knife seal bar to make a clean and consistent seal

MODEL NUMBER	MACHINE DIMENSIONS WIDTH(A)	HEIGHT(B)	LENGTH(C)	FILM WIDTH	CONVEYOR HEIGHT MIN	MAX	STANDARD POWER VOLTS	AMPS	PHASE	WEIGHT	SHP WT.
VSA1721	45″ 114 cm	58″ 147 cm	72″ 182 cm	22″ 55 cm	31.5″ 80 cm	34″ 86 cm	220	10	1	1000 lbs 453 kg	1100 lbs 498 kg
VSA 2530	71″ 181 cm	69″ 175 cm	95″ 242 cm	32″ 81 cm	33.5″ 85 cm	36″ 91 cm	220	20	1	1100 lbs 498 kg	1200 lbs 544 kg

EASTEY
ENGAGE technologies corporation

7041 Boone Avenue North, Brooklyn Park, MN 55428
(763) 428-4846 1 (800) 835-9344
www.eastey.com info@eastey.com

SQUID INK — CODING & MARKING SOLUTIONS
EASTEY — CASE SEALING & SHRINK PACKAGING EQUIPMENT
AFM — SHRINK SLEEVE & LABELING SOLUTIONS

ENGAGE technologies corporation

062424 Rev A